

KT6..

/, □ □ □

1.1 硬件要求

NA

SQ@+RwncA

1.2 上位机路径

Pcjc_qc

Bpgt cp,Qmdr



k

0,

2.1 功能概述

KT6..

k

k

2.2 适用机型

KT6..

2.3 设置步骤



KT6..

Kmb@sq






1, □ □

3.1 功能概述

KT6. . ! ! k

3.2 功能说明

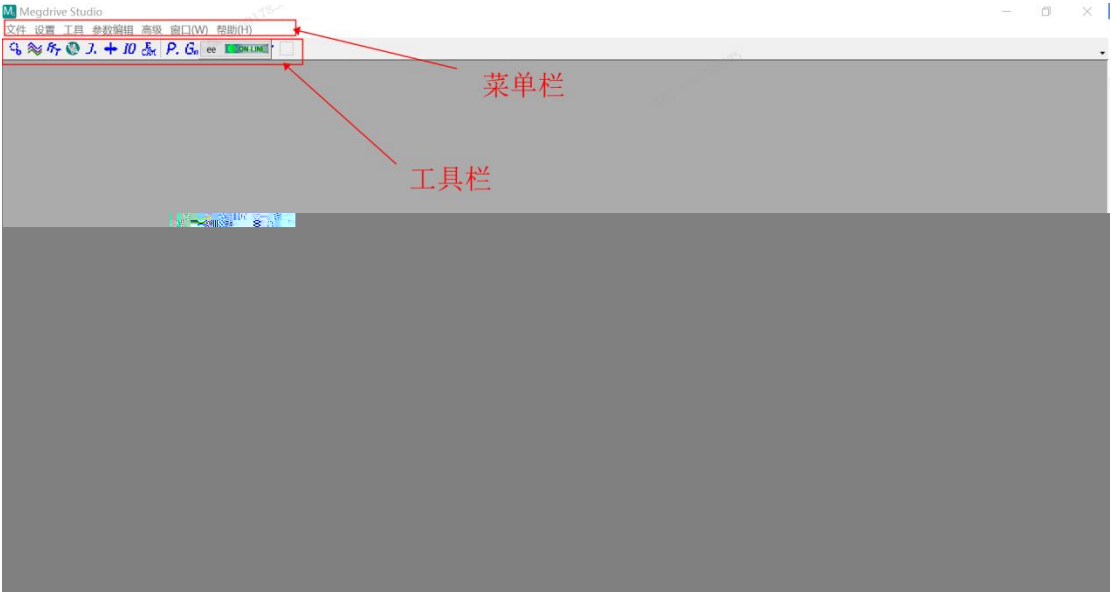

KT6. . P. 

k

3.3 语言切换

KT6...k



2, □

4.1 功能概述


! ! ! k

4.2 打开路径

Z k
P. k



4.3 功能说明

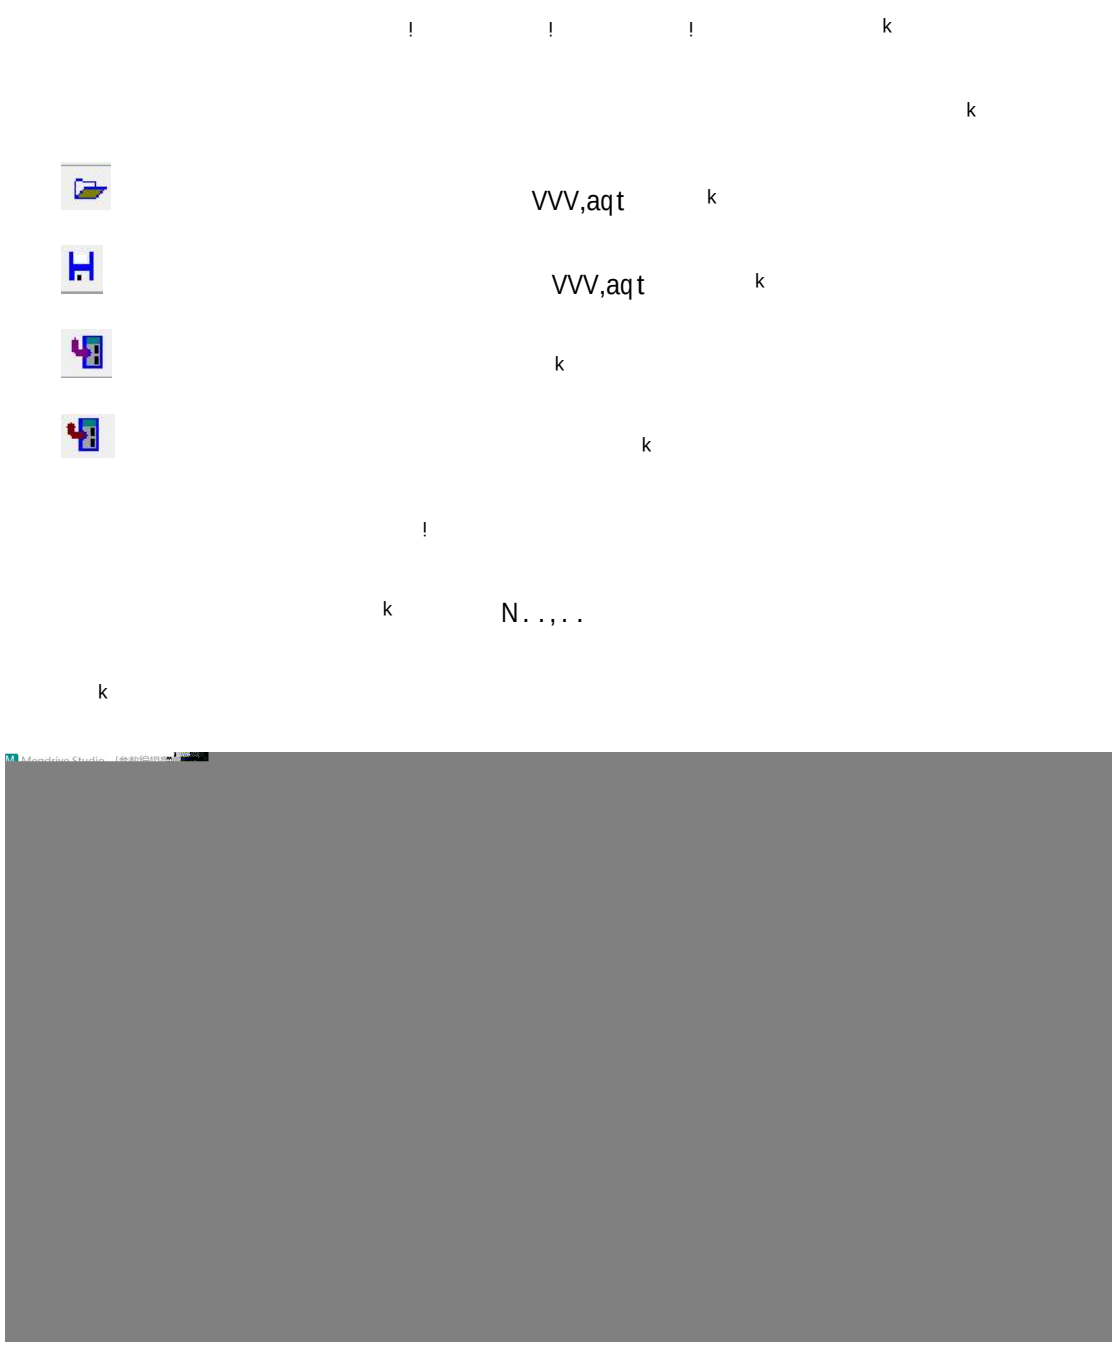

3,

5.1 功能概述

k

/K Kmb@sq

/i

2

k

5.2 打开路径

$$Z$$

k



5.3 功能说明

!

!

!

!

!

!

!

!

!

!

!

!

k



k



k



k



k



k




k



k

k

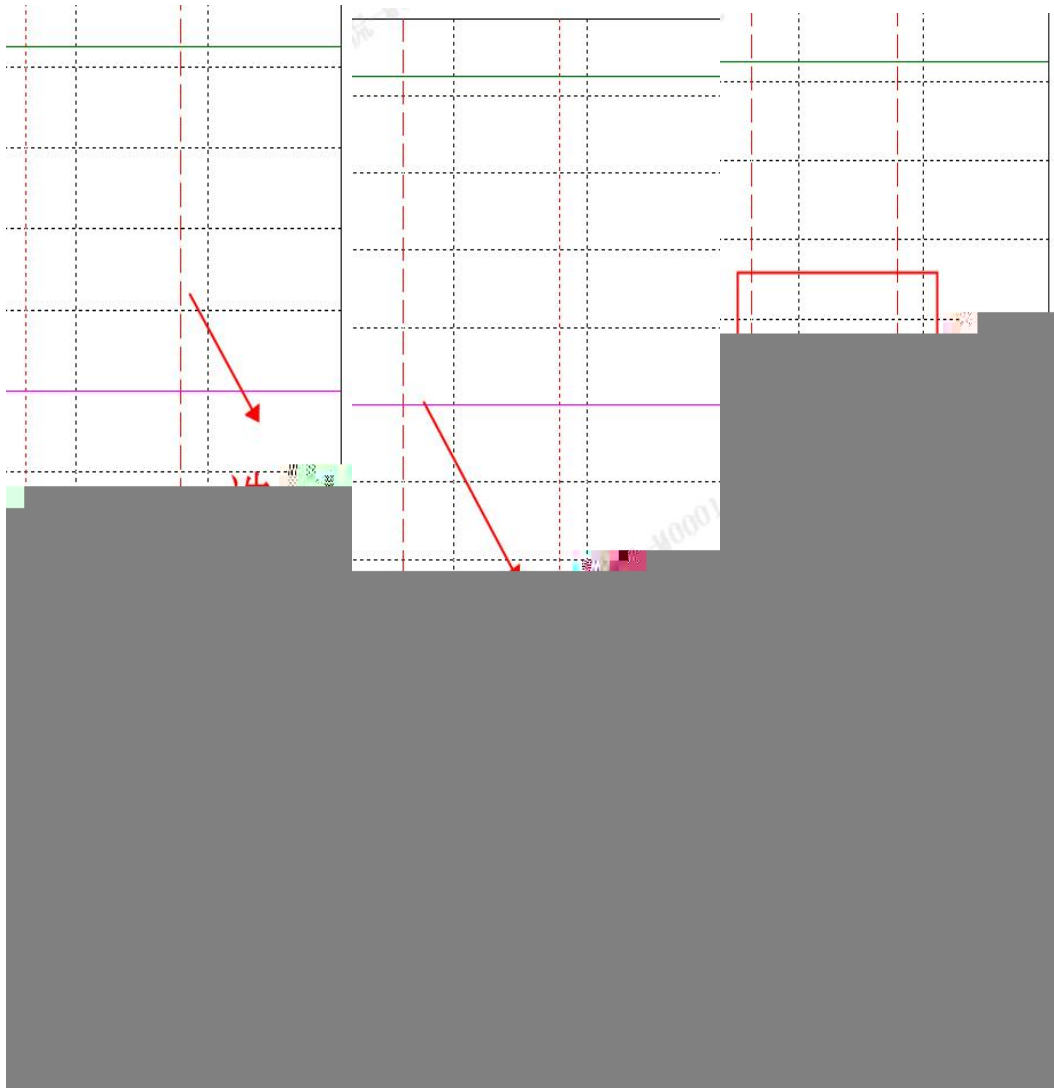

k

Arpj

k

k

AF /

AF /

k

AF /

k

☒ CH1

主频率设定值: PC v

Val1:

42.42

上移

Val2:

42.42

下移

k

☒ CH1

主频率设定值: PC v

Val1:

42.42

上移

Val2:

42.42

下移

触发条件设定

喜好设定

研发设置

触发条件设定

☐ 启用触发条件设定

通道

☒ CH1

☐ CH2

条件动作

☒ >=

