


# MV800 PROFINET Communication Option User Manual

BOM Code: R33011122

Version: V00

## 1 Product information

### 1.1 Designation rule




### 1.2 Functions and specifications

MV810-PNET02 option provides communication expansion for the MV800 drive series. Its functions and specifications are explained below:

#### 1.2.1 Function features

- (1) Transmission of process data through PZD
- (2) Access to drive parameters through PKW
- (3) 100 Mbps full duplex
- (4) Compatible with bus topology and shielded 2

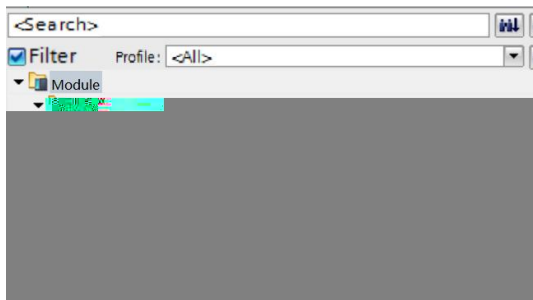

## 1.2.2 Technical specifications

PROFINET connector	Interface	Two RJ45 ports
	Transmission mode	High-speed bus
	Transmission media	CAT6 cables
	Galvanic isolation	500 V DC
Communication	Transmission type	Cyclic data transmission
	Module name	MV810-PNET02
	GSDML file	GSDML-V2.32-MEGMEET-MV800-2 0230830.xml
	Bus transmission speed	100 Mbps
Electrical specifications	Power voltage	3.3 V DC (provided by the drive)
	Insulation voltage	500 V DC
	Power consumption	1 W
	Weight	25 g
Environment specifications	Noise immunity	ESD (IEC 61800-5-1, IEC 6100-4-2) EFT (IEC 61800-5-1, IEC 6100-4-4) Surge Test (IEC 61800-5-1, IEC 6100-4-5) Conducted Susceptibility Test (IEC 61800-5-1, IEC 6100-4-6)
	Operating/Storage environment	Operating: -10 to 50 (temperature), 90% (humidity) Storage: -25 to 70

		(temperature), 95% (humidity)
	Vibration/Shock resistance	IEC 61131-2, IEC 68-2-6 (TEST FC) / IEC 61131-2 & IEC 68-2-27 (TEST Ea)

## 1.3 Terminal description

### 1.3.1 Layout

The front and back views of MV810-PNET02 are shown below.




Fig. 1

The option has GND, two RJ45 ports and the interface connected to a drive.

### 1.3.2 Pin definitions

The pin definitions of the PROFINET connector for MV810-PNET02 are listed below:

Pin	Name	Description
1	TX+	Transmit Data+
2	TX-	Transmit Data-
3	RX+	Receive Data+
4	N/C	NOT CONNECTED
5	N/C	NOT CONNECTED
6	RX-	Receive Data-
7	N/C	NOT CONNECTED
8	N/C	NOT CONNECTED



### 1.3.3 LED indicator description and fault diagnosis

MV810-PNET02 has eight LED indicators: protocol stack indicators LED4 and LED5 on the light guide column of the expansion box; power indicator LED1, communication indicator LED6, and protocol stack indicators LED2 and LED3 on PCB; and the two communication port LED indicators. Refer to the following tables for LED description.

# MEGMEET

Description of LED1 and LED6:

LED	Status	Description	Action
LED1 (Red)	On	Normal power supply for the PN option	No need for actions
	Off	No power supply for the PN option	Check whether the PN option is properly connected to the drive
LED6 (Red)	On	No communication between the PN card and the master	Check whether the PN card is properly connected to the master
	Off	Communication established between the PN card and the master	No need for actions

Description of protocol stack LED indicators:

Protocol stack LED	Color	Status	Description
LED2	Red	Steady on	PROFINET diagnostic alarm with maintenance state required or demanded
		Off	No PROFINET diagnostic alarm with maintenance state required or demanded pending
LED3	Green	Off	TPS-1 has not started correctly
		Flashing	TPS-1 is waiting for the synchronization of the master CPU (hardware completely started)
		Steady on	TPS-1 has started correctly
LED4	Red	Steady on	PROFINET diagnostic exists
		Off	No PROFINET diagnostic
LED5	Red	Steady on	No link status available
		Flashing	Link status ok, no communication with the PROFINET I/O controller
		Off	Normal communication between the PROFINET I/O controller and the PROFINET I/O device

Description of communication port LED indicators:

Status	Description	Action
Green light on	Normal connection	No need for actions
Green light off	No connection	Check whether the cables are properly connected
Yellow light flashing	Normal data communication	No need for actions

Yellow light steady on /off	No data communication	Check whether the communication is established between the master and the slave
-----------------------------	-----------------------	---

## 2 Installation

### 2.1 Accessory list

Name	Specifications	Quantity
MV810-PNET02 option	75 × 60 × 24 mm	1
User manual	A4 × 1	1

### 2.2 Installation method

The installation position, interface and steps of MV810-PNET02 are described below:

#### 2.2.1 Installation position

The installation position of the PN option for the MV810 drive is shown in Fig. 2 (taking enclosure B as an example, similar for other enclosures).




Fig. 2



Fig. 3

#### 2.2.2 Installation interface

The electrical interface of the PN option for the MV810 drive and the corresponding installation interface of the MV810 drive are shown in Fig. 3.

#### 2.2.3 Installation steps


Installation method: PN option front side mounting

(1) When the drive is powered off, press the granulated area on the middle-upper

## MEGMEET

part of the lower cover, slide it down with a certain amount of force to remove the lower cover, as shown in Fig. 4-a.

- (2) Use a straight screwdriver to pry open the dust-proof cap or remove the rubber plug, as shown in Fig. 4-b.
- (3) Install the PIN option: hold the expansion box (a bus card inside) upwards (indicators up), align the expansion box with the electrical bus interface in the installation position, and press down horizontally to buckle the spring snap of the expansion box into the groove at the lower part of the drive, as shown in Fig. 4-c and Fig. 4 d.
- (4) The bus option is successfully installed, as shown in Fig. 4-e.






Fig. 5 Grounding terminal connection

Grounding method: connect the B end of the grounding cable to the option's grounding terminal block, and you can check the grounding cable diameter and torque by referring to Table 1-1; connect the A end of the grounding cable to the grounding rack PE (grounding mark, circled in Fig. 6) of the drive (taking enclosure B as an example, similar for others), and you can check the grounding screw specifications and torque by referring to Table 1-2.

Table 1-1 Recommended diameter and torque for the grounding cable

Option	Screw	Diameter	Stripped part	Torque ( $\pm 10\%$ )
MV810-PNET02	M2.0	0.5 to 1.5 mm <sup>2</sup> / 28 to 16 AWG	5 to 6 mm	2 kg-cm / 1.7 lb.in / 0.2 N·m

Table 1-2 Recommended grounding screw and torque

Enclosure	Screw	Torque ( $\pm 10\%$ )
B	M3	7 kg-cm / 6.08 lb-in / 0.68 N·m
C	M4	15 kg-cm / 13.0 lb-in / 1.47 N·m

# MEGMEET

		Slave response: Byte0: Target station number (485 master station); Byte1: Source station number (local station number)
PKW1	Byte2	Command to read/write the function code (only one function code for each command) Ox03: Read one code
	Byte3	Ox06: Write one code, save to EEPROM Ox07: Write one code, not save to EEPROM Byte2: High byte of the command word Byte3: Low byte of the command word Slave response: Byte2: 0 Byte3: Ox03 response to reading; Ox06 and Ox07 response to writing; Ox80 + command code, response to error
PKW2	Byte4	Address of the function code to be read/written Byte4: High byte of the address; Byte5: Low byte of the address
	Byte5	Slave response: Byte4: High byte of the address; Byte5: Low byte of the address
PKW3	Byte6	For writing, PKW3 defines the specific value that is written; for reading, PKW3 defines the number of codes which are read (fixed value: 1) Byte6: High byte of the parameter value Byte7: Low byte of the parameter value
	Byte7	Slave response: Byte6: High byte of the function code value (response to reading), 0 (response to writing), high byte of the error code (response to error) Byte7: Low byte of the function code value (response to reading), 0 (response to writing), low byte of the error code (response to error)

# MEGMEET

Master sends control command word:

- Bit0: Forward running      0: Disabled 1: Enabled
- Bit1: Reverse running      0: Disabled 1: Enabled
- Bit2: Forward JOG          0: Disabled 1: Enabled
- Bit3: Reverse JOG          0: Disabled 1: Enabled
- Bit4: Decelerate to stop    0: Disabled 1: Enabled
- Bit5: Coast to stop        0: Disabled 1: Enabled
- Bit6: Fault reset           0: Disabled 1: Enabled
- Bit7: Emergency stop       0: Disabled 1: Enabled
- Bit8: High byte of the command word
- Bit9: Low byte of the command word

Byte8

Slave response status word:

- Bit0: Forward running      0: Disabled 1: Enabled
- Bit1: Reverse running      0: Disabled 1: Enabled
- Bit2: Stop                   0: Disabled 1: Enabled
- Bit3: Fault                  0: Disabled 1: Enabled
- Bit4: Power failure         0: Disabled 1: Enabled
- Bit5: Ready status          0: Disabled 1: Enabled
- Bit6: Motor number         0: Motor 1 1: Motor 2
- Bit7: Motor type            0: Asynchronous  
   1: Synchronous
- Bit8: Overload warning     0: Disabled 1: Enabled
- Bit9 - Bit10: Control mode 0: Keypad 1: Terminal  
   2: Communication

Byte9

Byte8: High byte of the status word

Byte9: Low byte of the status word

PZD1

PZD2

Byte10

The eleven words from PZD2 to PZD12 are used to read/write the internal parameters of the drive. You can set the parameters through P43.02 to P43.23 (use P43.02 to P43.12 to

# MEGMEET

PZD7	Byte20	P43.03	PZD3 receive	2: Drive torque upper limit reference (0.0 to 300.0%, rated motor current)
	Byte21			
PZD8	Byte22	P43.04	PZD4 receive	3: Braking torque upper limit reference (0.0 to 300.0%, rated motor current)
	Byte23			
PZD9	Byte24	P43.05	PZD5 receive	4: Torque reference (-300.0 to 300.0%, rated motor current)
	Byte25			
PZD10	Byte26	P43.06	PZD6 receive	5: FWD frequency upper limit reference (0.00 to P02.10)
	Byte27			
PZD11	Byte28	P43.07	PZD7 receive	6: REV frequency upper limit reference (0.00 to P02.10)
	Byte29			
PZD12	Byte30	P43.08	PZD8 receive	7: Voltage reference (VF separation) (0 to 1000)
		P43.09	PZD9 receive	8: Virtual input terminal command (0 to 0xFF corresponding to DI8 to DI1)
		P43.10	PZD10 receive	9: Output terminal bus command (set the output terminal function to No. 39, 0 to 0xF corresponding to RO, DO3, DO2, DO1)
		P43.11	PZD11 receive	10: AO1 output reference (0 to 100.0%)
	Byte31	P43.12	PZD12 receive	11: HDO1 output reference (0 to 100.0%)
		P43.13	PZD2 feedback	12: HDO2 output reference (0 to 100.0%)
		P43.14	PZD3 feedback	13: PID reference (0.0 to 100.0%)
				14: PID feedback (0.0 to 100.0%)
				15 to 30: Reserved
				0: Disabled
			1: Frequency reference (0.01 Hz)	
			2: Ramp reference (0.01 Hz)	
			3: Output frequency (0.01 Hz)	

# MEGMEET

		P43.15	PZD4 feedback	4: Output voltage (1 V) 5: Output current (0.1 A)
		P43.16	PZD5 feedback	6: Bus voltage (0.1 V) 7: Motor power (0.1%) 8: Output torque (0.1%)
		P43.17	PZD6 feedback	9: Exciting current (0.1 A) 10: Torque current (0.1 A)
		P43.18	PZD7 feedback	11: Status word (0 to 0xFFFF) 12: Fault code (0 to 46)
		P43.19	PZD8 feedback	13: DI1 to DI4 state (0 to 0xFFFF) 14: DI5 to DI8 state 15: DO state (0 to 0xF)
		P43.20	PZD9 feedback	16: AI1 input voltage (0 to 10.00 V)
		P43.21	PZD10 feedback	17: AI2 input voltage (-10.00 V to 10.00 V) 18: HDI input frequency (0 to 50.000 kHz)
		P43.22	PZD11 feedback	19: AO output (0 to 100.0%) 20: HDO1 output (0 to 50.000 kHz) 21: HDO2 output (0 to 50.000 kHz)
		P43.23	PZD12 feedback	22: PID reference (-100.0% to 100.0%) 23: PID feedback (-100.0% to 100.0%) 24: PID deviation (-100.0% to 100.0%) 25: PID output (-100.0% to 100.0%) 26 to 30: Reserved
		Byte10: High byte of the parameters		
		Byte11: Low byte of the parameters (similar for other bytes)		

## 4 Example of PN parameter setting

The PN user-defined message has two modes.

### **Conventional PN communication:**

This is the conventional communication mode between the controller and the PN device. Each drive shall be equipped with a PN option. The address of the first two bytes in the user-defined protocol is not required. You can set the function code as below:

P02.02 = 2 (communication control)

P02.03 = 3 (PN communication mode)

P02.05 = 8 (frequency reference channel set to PN)

P15.00 ones place = 0 (non PN-to-485 function)

P40.01 = 3.0 s (detection for expansion card identification timeout, can be modified to other values)

P43.01 = 1 (0 is the standard message 1, and 1 is the user-defined message)

P43.02 to P43.12 are used to set the parameters which the controller can change.

P43.13 to P43.23 are used to set the parameters which the controller can read.

### **PN to 485 (one PN option controls up to five drives):**

In this mode, only one drive is installed with the PN option, which transmits the controller message to other drives through 485. The frame header and the frame tail is not included during transmission, which makes the length of the transmitted message to 33 bytes. Only user-defined messages are allowed in this mode. The controller uses the first two bytes (485 station number) to visit the corresponding drive. The function code setting can be further divided into two types:

(1) 485 master

P02.02 = 2 (communication control)

P02.03 = 3 (PN communication mode)

P02.05 = 8 (frequency reference channel set to PN)

P15.00 ones place = 1 (PN to 485 function enabled)

P15.02 is used to set the local 485 station number

P40.00 = 1 (PN to 485 master function enabled)

P40.01 = 3.0 s (detection for expansion card identification timeout, can be modified to other values)

P43.01 = 1 (only user-defined message is supported)

P43.02 to P43.12 are used to set the parameters which the controller can change.

P43.13 to P43.23 are used to set the parameters which the controller can read.

## MEGMEET

(2) 485 slave

P02.02 = 2 (communication control)

P02.03 = 0 (PN communication mode)

P02.05 = 0 (frequency response channel set to PN)

P15.00 ones place = 1 (PN to 485 function enabled)

P15.02 is used to set the local 485 station number

P40.00 = 0 (PN to 485 slave function enabled)

P40.01 = 3.0 s (detection for expansion card identification timeout, can be modified to other values)

P43.01 = 1 (only user-defined message is supported)

P43.02 P43.12 are used to set the parameters which the controller can change.

P43.13 P43.23 are used to set the parameters which the controller can read.

Note: the present PN-485 baud rate is set at 200 k; the interval between the master sending messages and receiving the slave response is less than 5 ms; the master transmits one PN message every 50 ms (this cycle shall be larger than the overall time needed for the sending and response of one message); while the sending frequency of the controller is higher, it is possible that the corresponding data and response may be received only after several round

# MEGMEET

Shenzhen Megmeet Electrical Co., Ltd.

Address: 5th Floor, Block B, Unisplendour Information Harbor, Langshan Road, Shenzhen, 518057, China

Tel: +86-755-86600500

Fax: +86-755-86600562

Website: www.megmeet.com

Service email: driveservice@megmeet.com

All rights reserved. The contents in this document are subject to change without prior notice.

<b>MEGMEET</b>	
Warranty bill of communication option	
Customer company:	
Detailed address:	
Contact:	Tel:
Option model:	
Option number:	
Purchase date:	
Service unit:	
Contact:	Tel:
Maintenance date:	

<b>MEGMEET</b>	Checker: _____ Manufacturing date: _____
Shenzhen Megmeet Electrical Co., Ltd.	The product has been tested in line with design standards and approved for leaving the factory.
Certificate	